


Lunar Flashlight and Near Earth Asteroid Scout: Exploration Science Using Cubesats

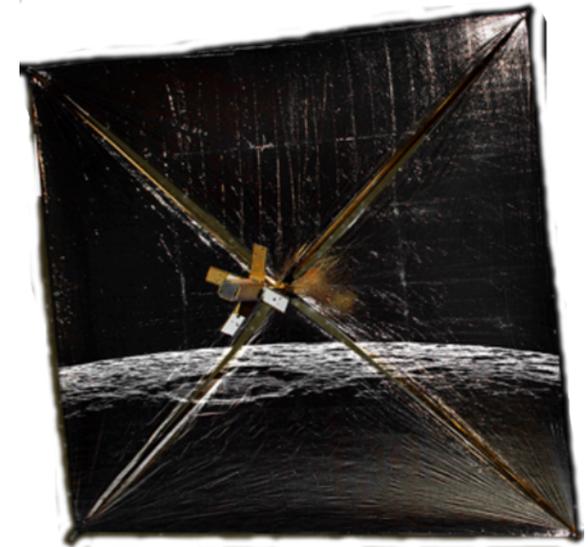

Barbara Cohen

Lunar Flashlight PI, NASA Marshall Space Flight Center

Paul Hayne, Ben Greenhagen, David Paige, *LF Science Team*


Julie Castillo, Paul Abell, Lance Benner, Bill Farrell, Jake
Bleacher, Paul Chodas, Lee Graham, *NEAS Science Team*



EM1 Secondary Payloads



- EM1 launch opportunity (2018) will have 11 6U cubesat dispensers
- Three payloads manifested from the Advanced Exploration Systems (AES) program
 - Relevance to Space Exploration Strategic Knowledge Gaps (SKGs)
 - Synergistic use of previously demonstrated technologies
 - Life-cycle cost and optimal use of available civil servant workforce
- Other secondary payloads will be added
 - NASA – SIMPLEX, LCAS, Cubesat Challenge
 - Others – universities, research centers, DOD, etc?

Payload <i>NASA Centers</i>	Strategic Knowledge Gaps Addressed	Mission Concept
BioSentinel <i>ARC/JSC</i> 	Human health/performance in high-radiation space environments <ul style="list-style-type: none"> • Fundamental effects on biological systems of ionizing radiation in space environments 	Study radiation-induced DNA damage of live organisms in cis-lunar space; correlate with measurements on ISS and Earth
Lunar Flashlight <i>JPL/MSFC/MHS</i> 	Lunar resource potential <ul style="list-style-type: none"> • Quantity and distribution of water and other volatiles in lunar cold traps 	Locate ice deposits in the Moon's permanently shadowed craters
Near Earth Asteroid (NEA) Scout <i>MSFC/JPL</i> 	NEA Characterization <ul style="list-style-type: none"> • NEA size, rotation state (rate/pole position) How to work on and interact with NEA surface <ul style="list-style-type: none"> • NEA surface mechanical properties 	Slow flyby/rendezvous and characterize one NEA in a way that is relevant to human exploration





National Aeronautics and
Space Administration

Ames

Discovery • Innovations • Solutions

Biosentinel: DNA Damage-and-Repair Experiment Beyond Low Earth Orbit

- **What:** Yeast radiation biosensor measures DNA damage caused by space radiation: specifically, double strand breaks (DSBs)
- **Why:** Space radiation's unique spectrum cannot be reproduced on Earth
 - Various high-energy particles/energy spectra; omnidirectional; continuous; low flux
 - Health risk for humans over long durations beyond LEO
- **How:** Before launch, engineered *S. cerevisiae* cells (brewer's yeast) are dried & placed in arrays of microwells
 - In space, a group of wells is rehydrated every few weeks
 - Cells remain dormant until growth is activated by a DSB + gene repair
 - Yeast repair mechanisms in common with human cells; well studied in space

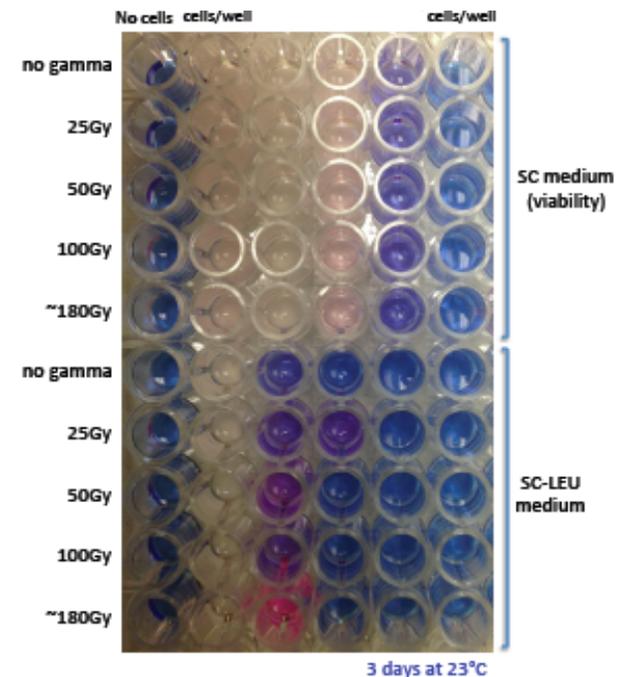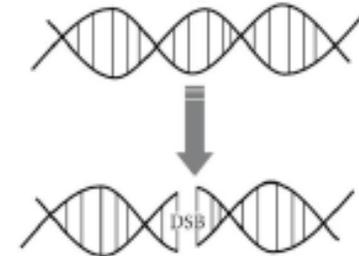

alamarBlue turns pink when cells are metabolically active

Near Earth Asteroid Scout

*Marshall Space Flight Center/Jet Propulsion
Lab/LaRC/JSC/GSFC/NASA*


*One of three 6U
Cubesats sponsored
by Advanced
Exploration System,
Joint Robotic Program
to fly on SLS EM-1*



GOALS

*Characterize one
candidate NEA with an
imager to address key
Strategic Knowledge
Gaps (SKGs)
Demonstrates low cost
capability for HEOMD for
NEA detection and
reconnaissance*

*Measurements: NEA volume, spectral type, spin and orbital
properties, address key physical and regolith mechanical SKGs*

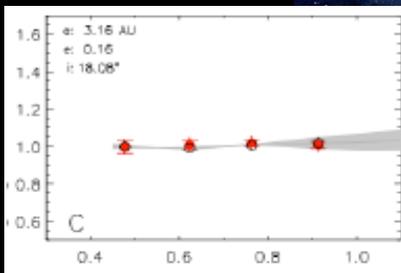



Lunar Flashlight JPL/MSFC




- One of three 6U Cubesats sponsored by Advanced Exploration Systems to fly on SLS EM-1
- Addresses NASA Strategic Knowledge Gap to understand water and other volatiles in lunar polar regions
- Identifies surface ice deposits and maps favorable locations for in-situ utilization

Demonstrates low cost capability for lunar measurements

- 18 month nominal mission, 30 month max
- <11.4 kg 6U Cubesat
- ~80 m² sail
- <40W solar power (BOL)
- 1 kbps data link from lunar orbit

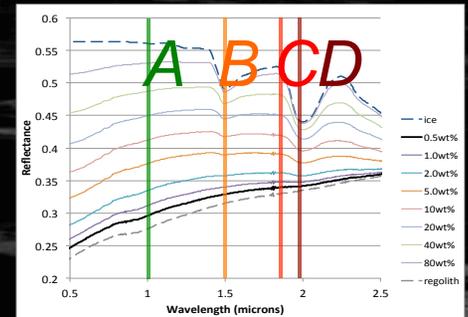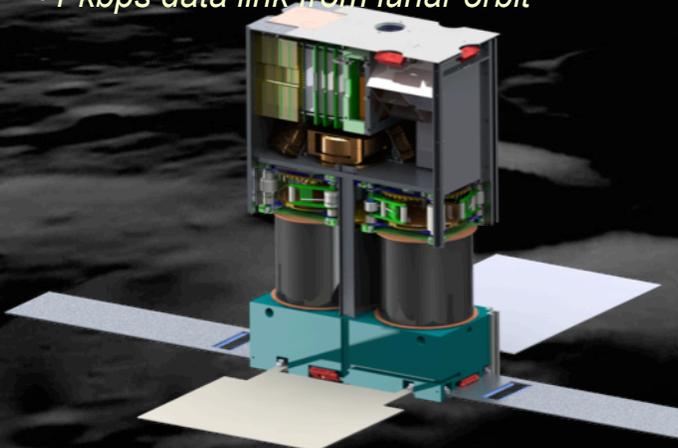

Sunlight is reflected off the sail to the lunar surface in a 3° beam. Light diffusely reflected off the lunar surface enters the spectrometer to distinguish water ice from regolith.



Lunar Flashlight Goals



Lunar Strategic Knowledge Gaps



I. Understand the lunar resource potential

D. Composition/quantity/distribution/form of water/H species and other volatiles associated with lunar cold traps.

Narrative: Required “ground truth” in-situ measurement within permanently shadowed lunar craters or other sites identified using LRO data. Technology development required for operating in extreme environments. Enables prospecting of lunar resources and ISRU. Relevant to Planetary Science Decadal survey.



- Lunar Flashlight will illuminate permanently-shadowed and detect water ice absorption bands in the near-infrared – **Measurement goal**
- By repeating this measurement over multiple points, Lunar Flashlight will create a map of surficial ice concentration that can be correlated to previous mission data and used to guide future missions – **Mapping goal**

Lunar ice frost as a human resource

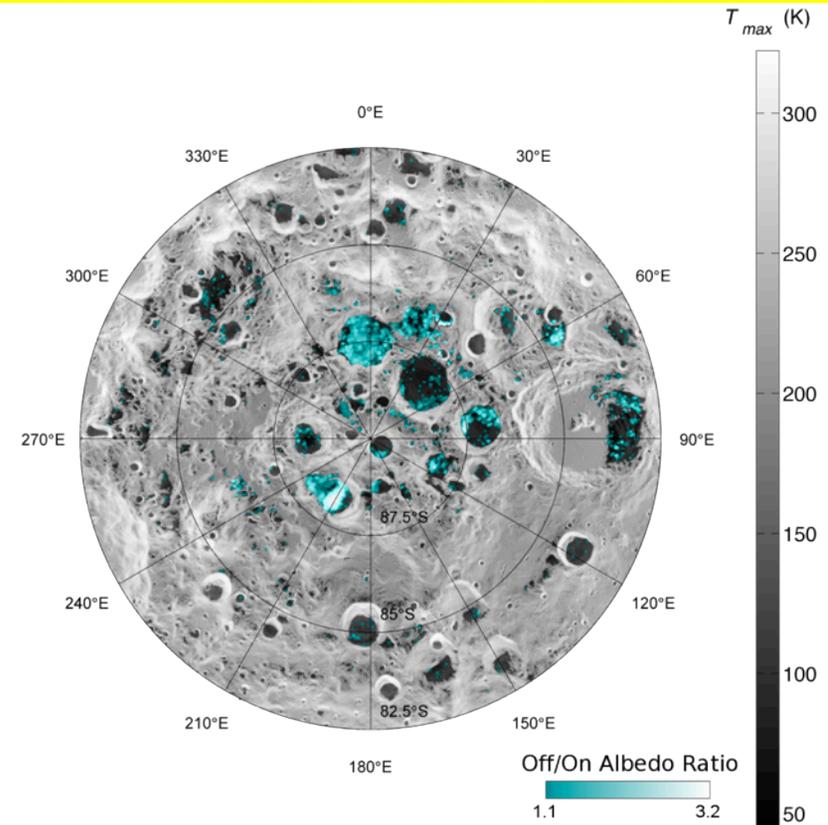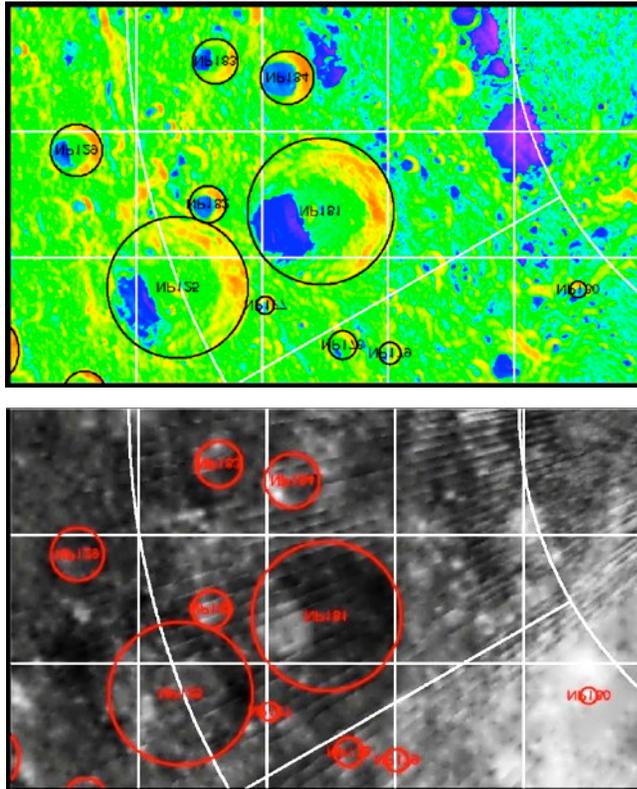


- Locations where Diviner measures the coldest year-round temperatures also show high albedo in LOLA at $1.064 \mu\text{m}$, consistent with water frost
- Ultraviolet albedo data from LAMP also show evidence for water ice at the lunar surface, but are not yet definitive

LF Measurement

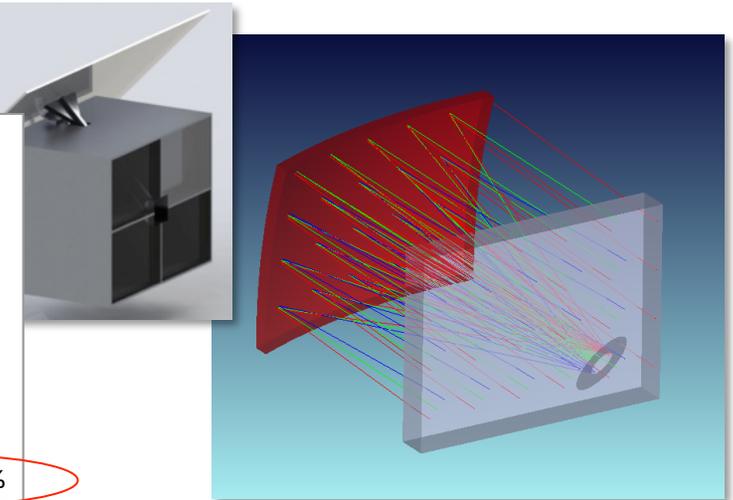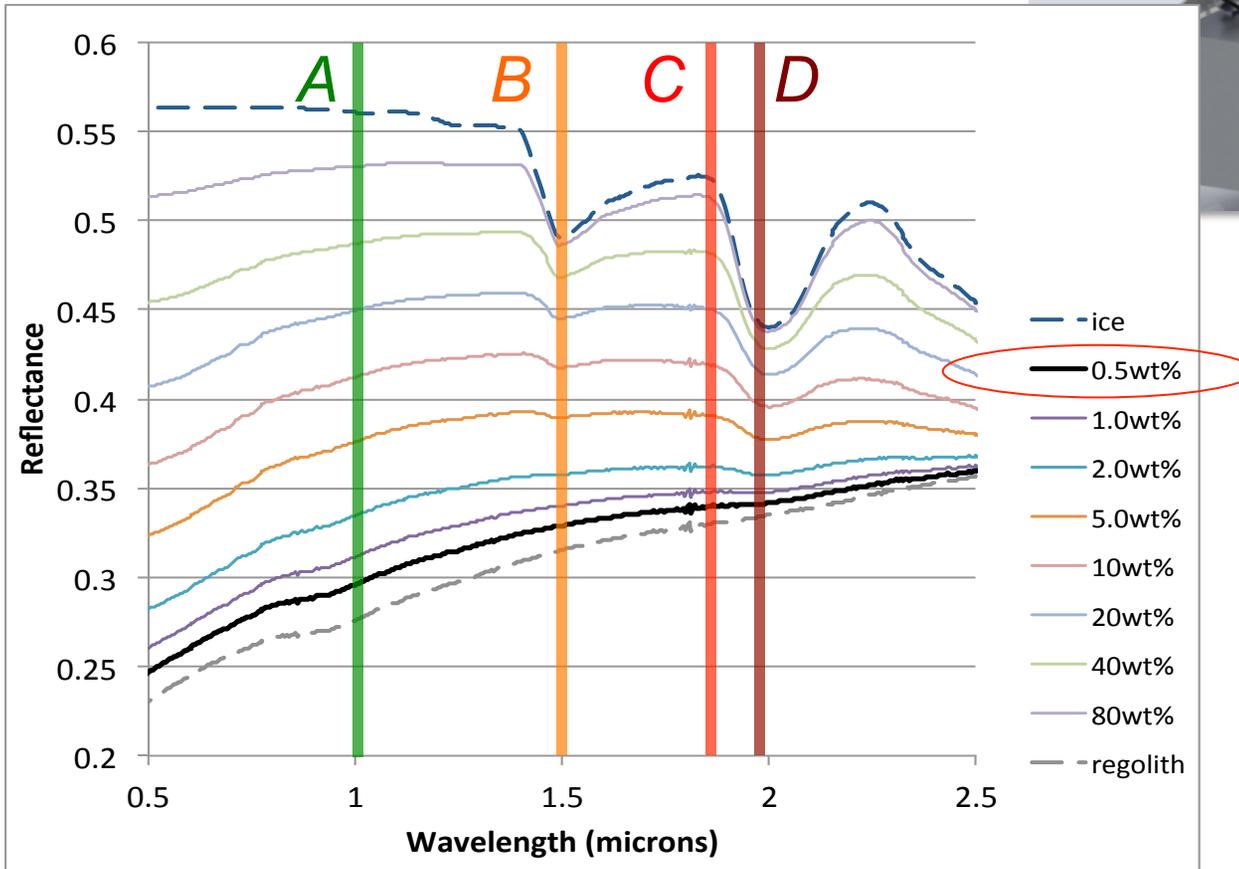


- Four-channel point spectrometer
- Off-axis parabola telescope design
- Judson (Teledyne) strained-lattice InGa:As PVs detectors
 - Passively cooled operation at -65C

LF Mapping

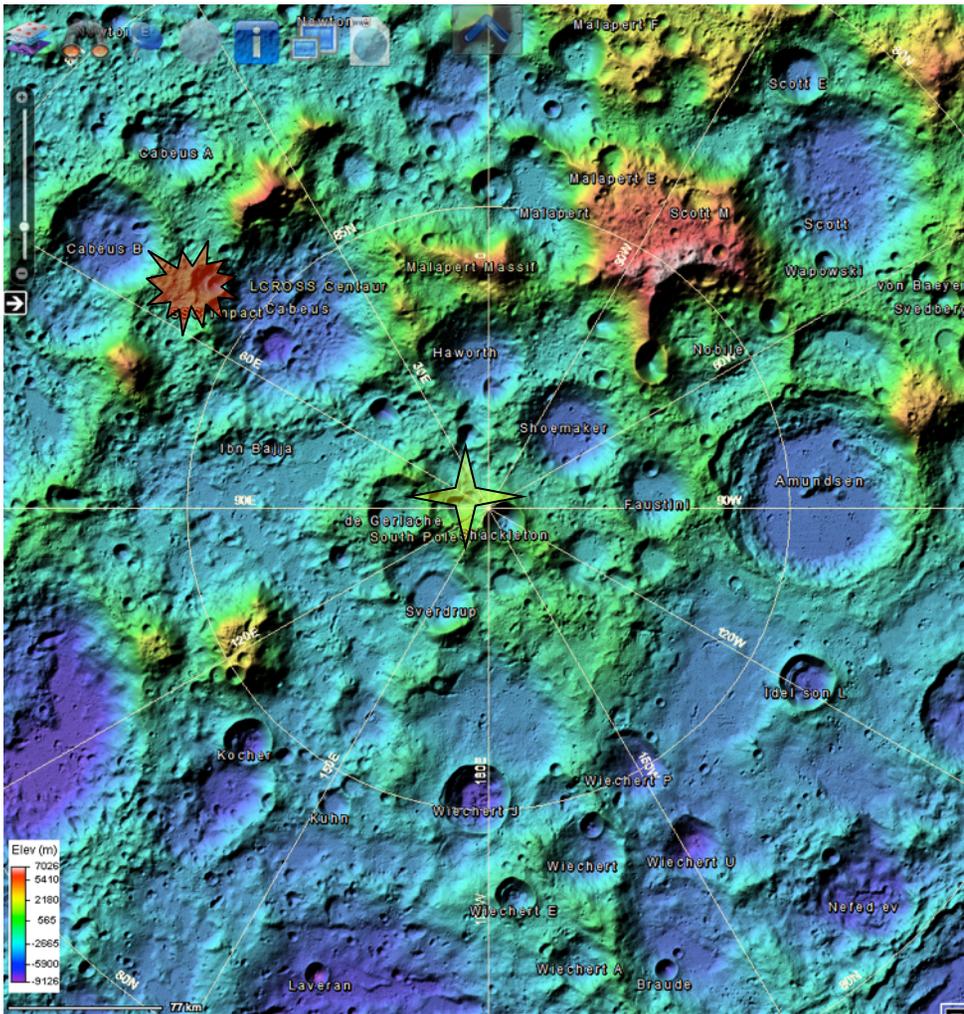

- 10% of PSRs within 10° of pole observed over 60 orbits, covers Shoemaker Crater and LCROSS site with <2 km/px

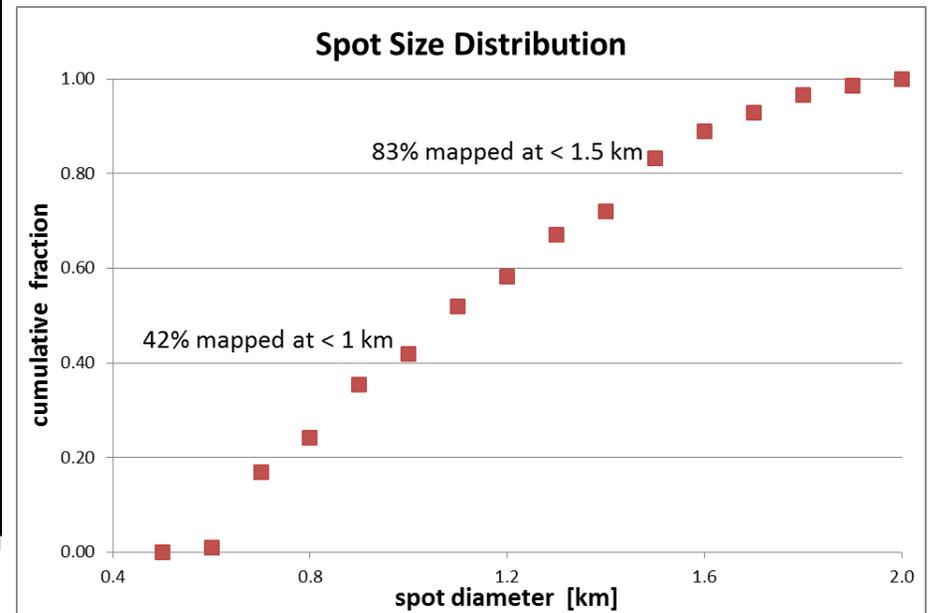

Near-Earth Asteroid Scout Goals



HEO-Defined Strategic Knowledge Gaps	Expected Performance	Risk Reduction or Benefit
Location (position prediction/orbit)	OCC decrease to 0	● ● ●
Size (existence of binary/ternary)	High accuracy on size, detection of satellites	● ● ● ●
Rotation rate & pole orientation	High accuracy on pole and velocity	● ● ● ●
Particulate environment/Debris field	Characterization of particle density in target vicinity	● ● ● ● ●
Regolith mechanical & geotechnical properties	<i>Indirect (imagery interpretation)</i>	● ● ● ● ●
Mass/density estimates (internal structure)	<i>Indirect (based on taxonomic characterization)</i>	● ● ● ●
Surface morphologies and properties	Morphology at resolution of astronaut's foot	● ● ● ● ●
Mineralogical & chemical composition	<i>Indirect from taxonomic characterization</i>	● ● ● ● ●

● Crew/Mission
 ● Operations
 ● Cost
 ● Performance
 ● Science/Engineering



Baseline Target: 1991 VG



- $H=28.4\pm0.7$ $D\sim 5-12$ meters Albedo = unknown
- Position is known within 2700 km (1σ) but optical observation opportunity in July '17 will decrease uncertainty to a few 100s km
- Rotation period between a few minutes and less than 1 hr
- Unlikely to have a companion
- Unlikely to retain an exosphere or dust cloud
 - Solar radiation pressure sweeps dust on timescales of hours or day

Secondary Targets	Absolute magnitude	30% albedo Diameter (m)	5% albedo Diameter (m)	Orbit Condition Code	Observation Opportunity prior to launch
2001 GP ₂	26.9	10	25	6	Depends on launch date 2020-10 (Optical)
2013 BS45	25.9	11	51	0	2015-01 (Optical)
2008 EA ₉	27.7	7	17	5	none
2012 UV ₁₃₆	25.5	19	47	1	2014-08 (Optical) 2020-05 (RADAR)

NEAS Science Products

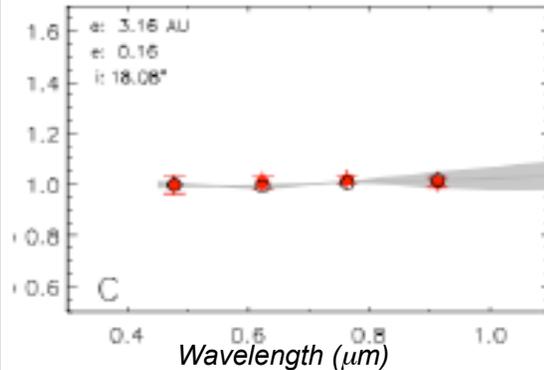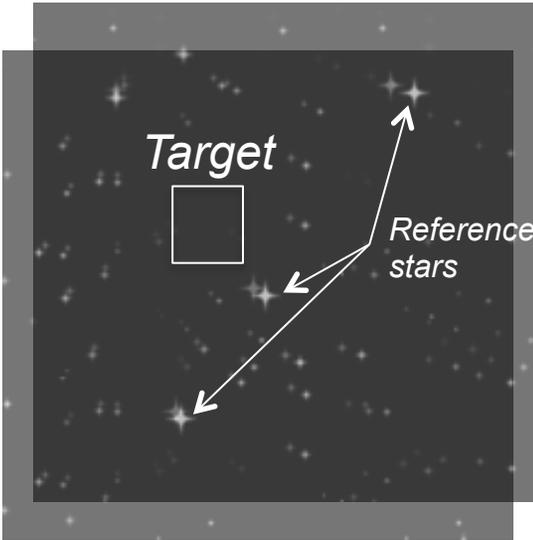

Target Detection and Approach

Light source observation


SKGs: Ephemeris determination and composition assessment



Target Reconnaissance

50 cm/px resolution over 80% surface

SKGs: volume, global shape, spin rate and pole position determination



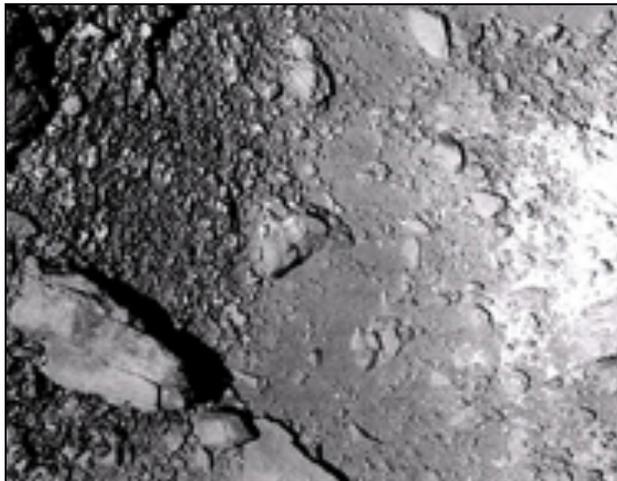


Close Proximity Imaging

High-resolution imaging, 10 cm/px GSD over >30% surface

SKGs: Medium-scale morphology, regolith properties, and local environment characterization

NEAS Proximity Science

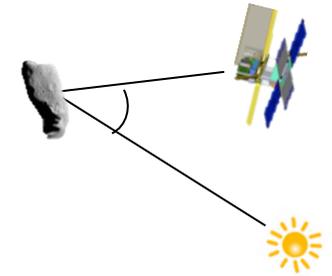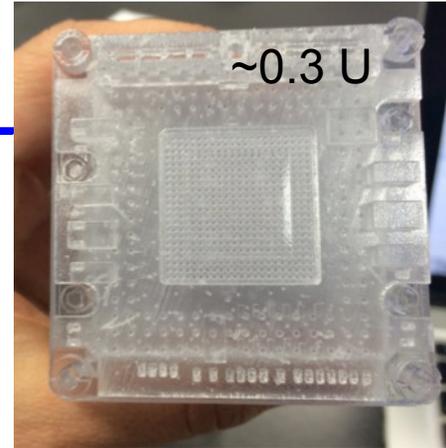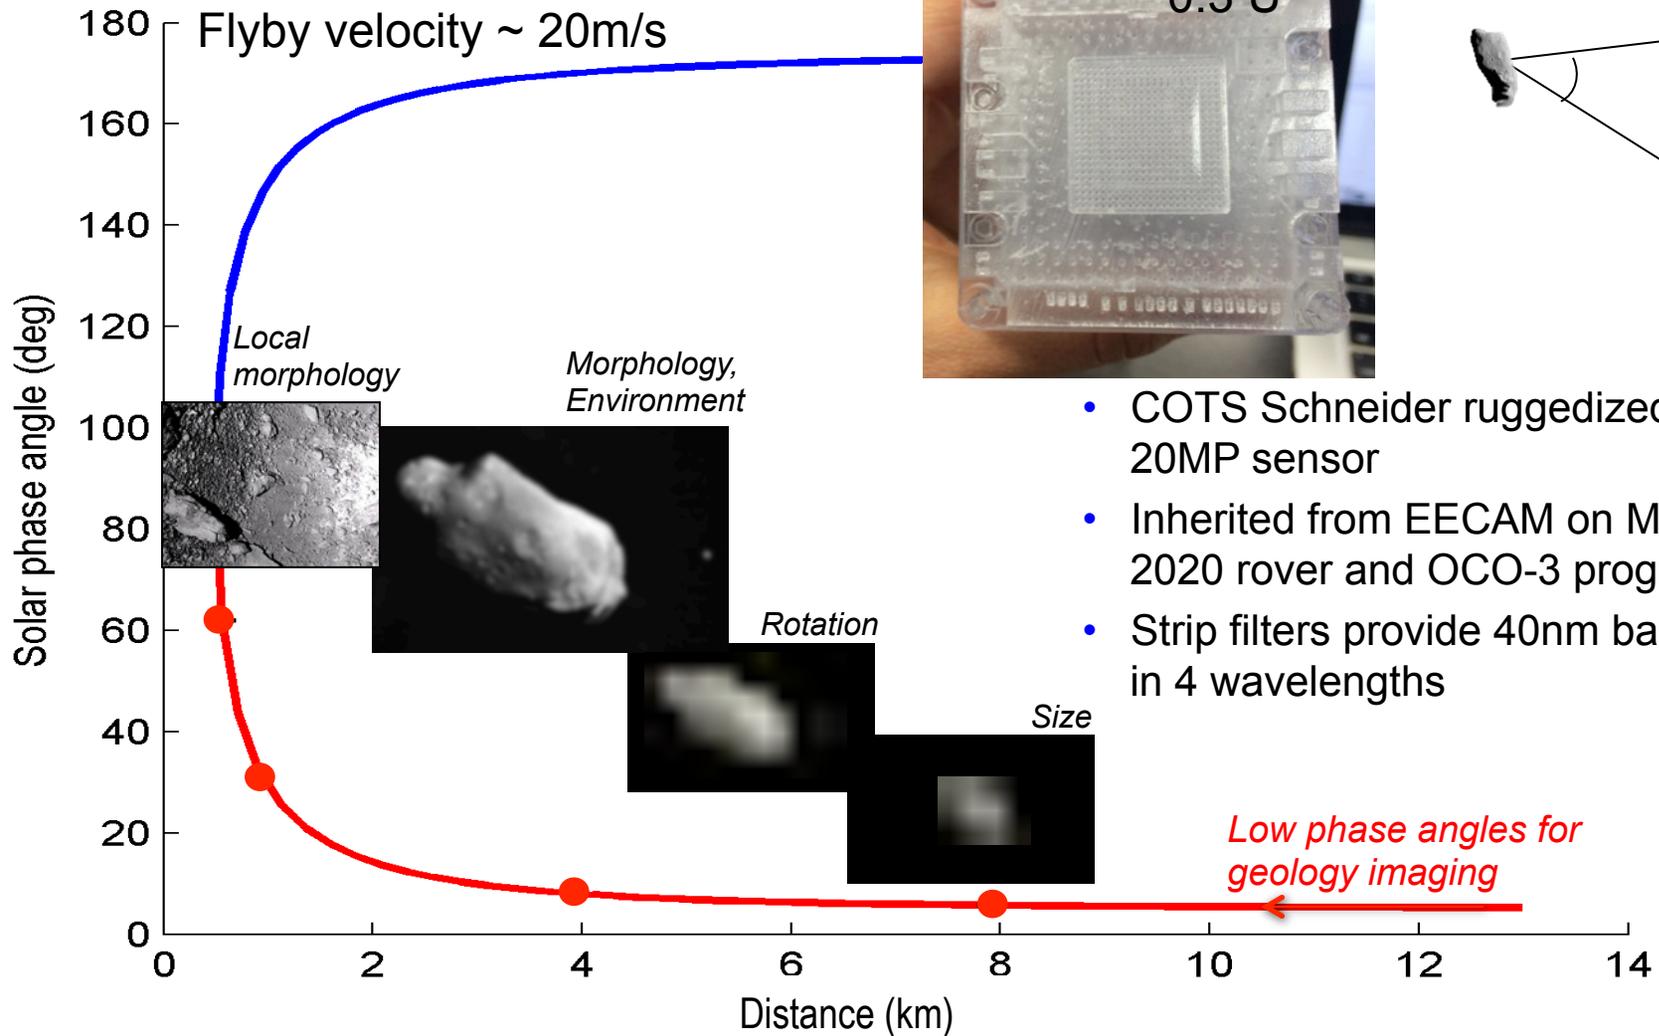


- COTS Schneider ruggedized lens, 20MP sensor
- Inherited from EECAM on Mars 2020 rover and OCO-3 programs
- Strip filters provide 40nm bandpass in 4 wavelengths


Low phase angles for geology imaging

Fitting into 6U is challenging


Payload	<ul style="list-style-type: none"> Lunar Flashlight: Custom spectrometer built in-house NEA Scout: Heritage JPL MSL/Mars 2020 imager (400-900 nm)
Mechanical & Structure	<ul style="list-style-type: none"> "6U" CubeSat form factor (~10x20x30 cm) <12 kg total launch mass Modular flight system concept
Propulsion	<ul style="list-style-type: none"> ~85 m² aluminized Kapton solar sail (based on NanoSail-D2)
Avionics	<ul style="list-style-type: none"> Radiation tolerant LEON3-FT architecture
Electrical Power System	<ul style="list-style-type: none"> Simple deployable solar arrays with UTJ GaAs cells (~35 W at 1 AU solar distance) 6.8 Ah Battery (3s2p 18650 Lithium Cells) 10.5-12.3 V unregulated, 5 V/3.5 V regulated
Telecom	<ul style="list-style-type: none"> JPL Iris 2.0 X-Band Transponder; 1 W RF, supports doppler, ranging, and D-DOR 2 pairs of INSPIRE-heritage LGAs (RX/TX) Lunar Flashlight: ~500 bps to 34m DSN at all times.
Attitude Control System	<ul style="list-style-type: none"> 15 mNm-s (x3) & 100 mNm-s RWAs Zero-momentum slow spin during cruise VACCO R-236fa (refrigerant gas) RCS system Nano StarTracker, Coarse Sun Sensors & MEMS IMU for attitude determination

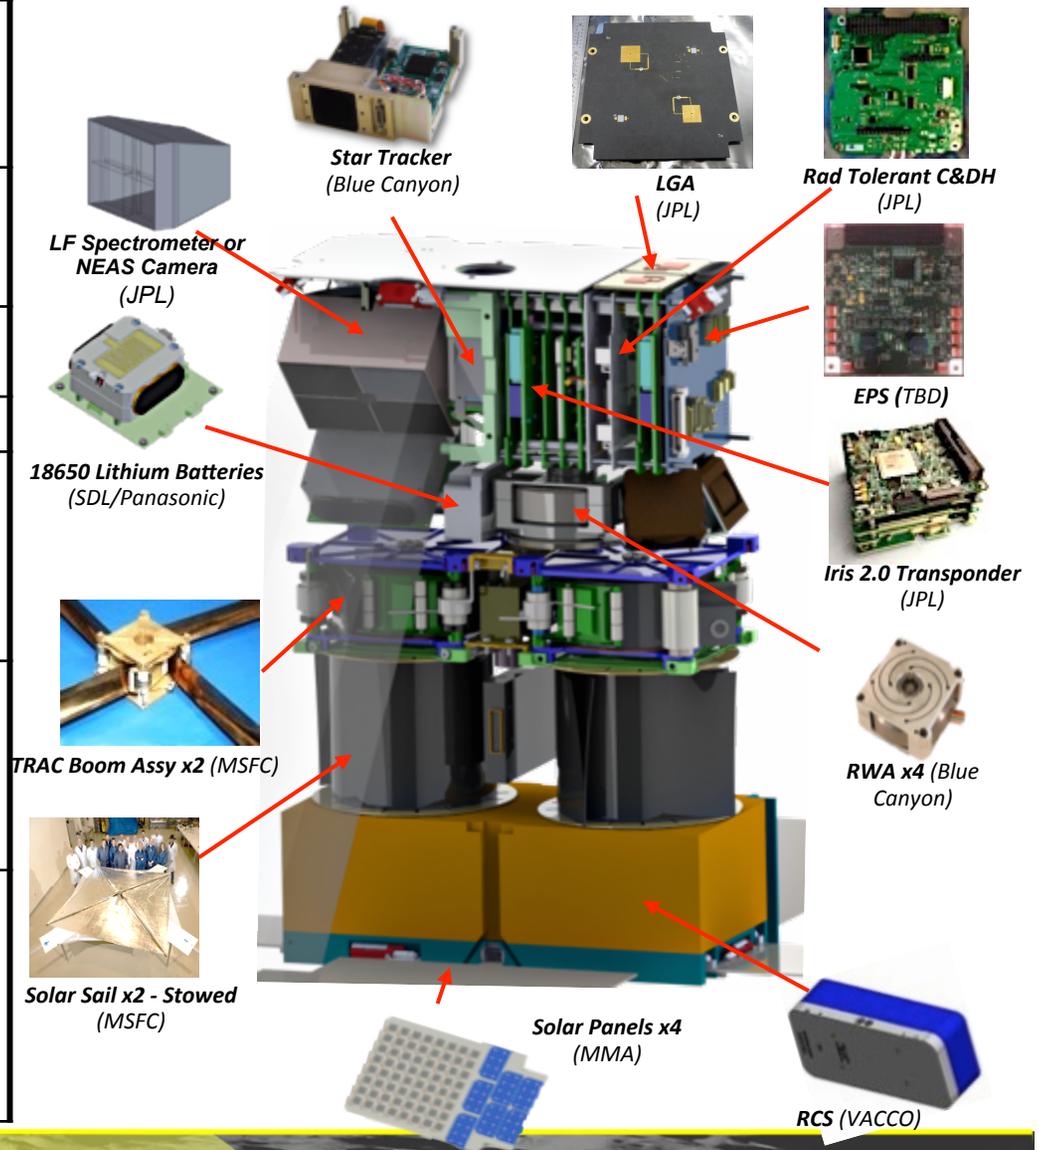

Solar sailing is challenging

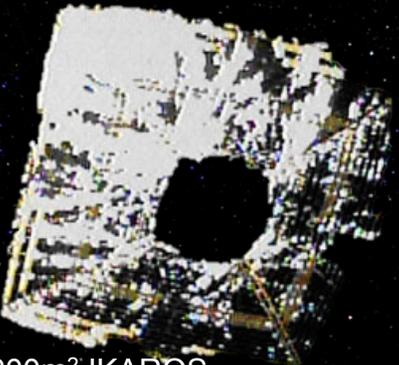

200m² IKAROS
JAXA
Bus mass / Sail area =
1.6 kg/m²

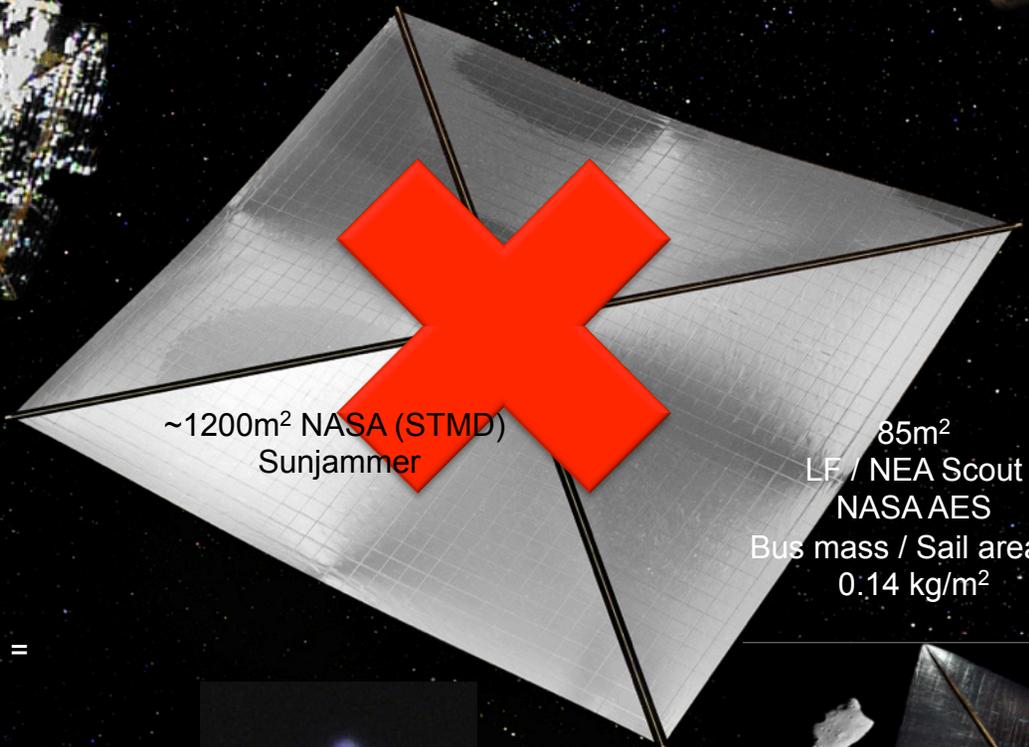

~1200m² NASA (STMD)
Sunjammer

85m²
LF / NEA Scout
NASA AES
Bus mass / Sail area =
0.14 kg/m²



32m² Lightsail-1
Planetary Society
Bus mass / Sail area =
0.15 kg/m²



3.5-m NanoSail-D2
(2010)
Bus mass / Sail area =
1.1 kg/m²




20-m ground demo (2005)

Summary

- NASA is using cubesat missions to address Exploration SKGs and conduct science
- These missions further the maturity of CubeSats
 - Long-lived CubeSat bus for deep space missions (C&DH, EPS, ADCS, Deep Space Transponder)
 - Characterization of deep space environment effects on CubeSats (building on INSPIRE)
 - Mature CubeSat propulsion methods
- Future potential of small missions for science & exploration
 - Part of 1st generation of cubesat-style planetary missions to conduct real science measurements
 - Secondary spacecraft hosted on interplanetary missions



NEAS Rendezvous Target Search

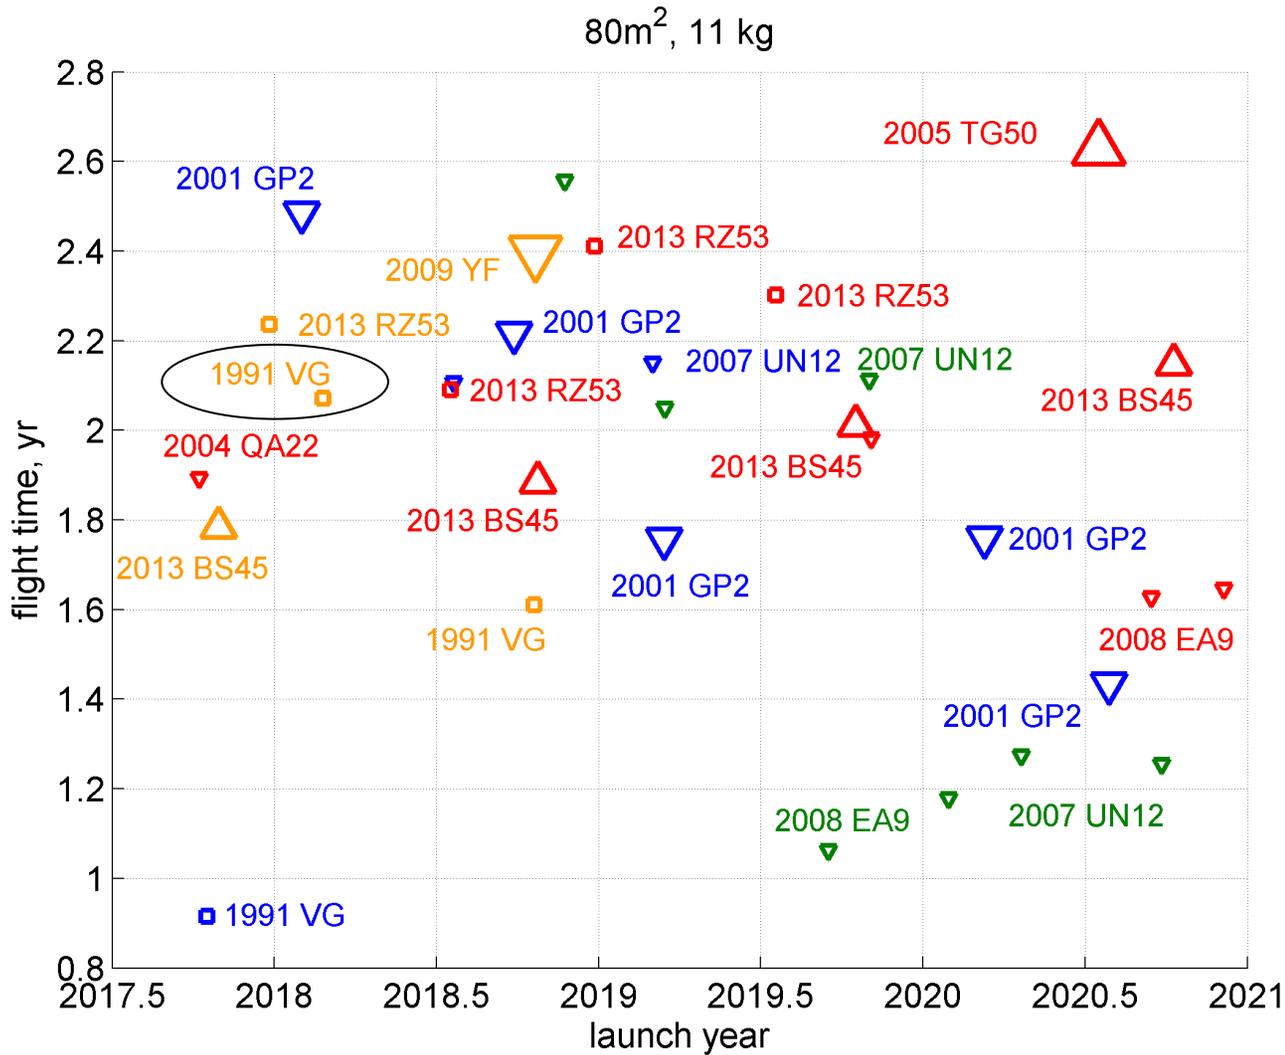

Telecom Distance (AU)

- blue < .25
- green < .5
- orange < .75
- red < 1

OCC

- △ under 2
- under 4
- ▽ under 7

Appx diameter

- small < ~15 m
- med. < ~30 m
- large < ~50 m